CHENXIN LIGHTING

Anhui Chenxin Lighting Electrical Appliance Co.,LTD
Office Address:No.1009,International Business Center B# Block,Huguang RD,
Shushan District,Hefei,China
Factory Address:Huoshan County,Lu' an City,Anhui,China
Tel:+86-551-65856715,Cell:+86-18119606995,Email:cxlight@ahcxlight.com
Web:www.ahcxlight.com, https://ahcxlight.en.made-in-china.com

CHENXIN LIGHTING

PRODUCTS CATALOG

LED FILAMENT BULB

CHENXIN LIGHTING

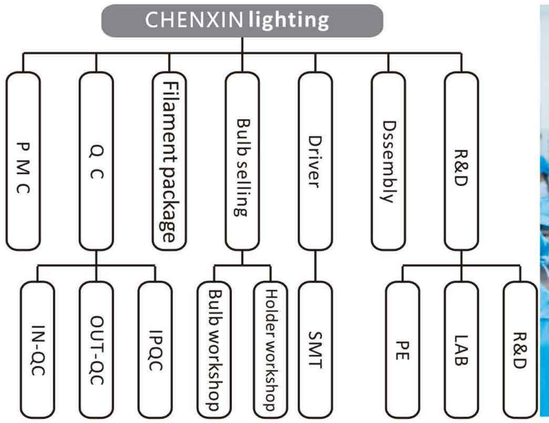

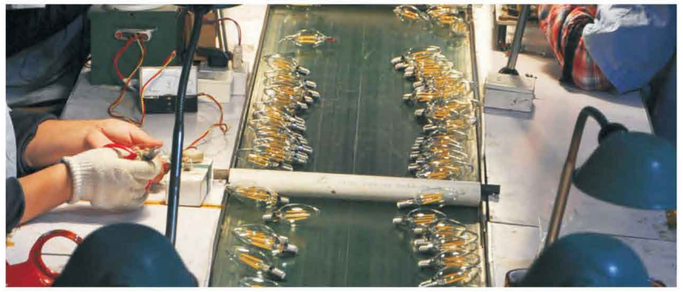

Producing lines	No.of lines	Total output/month(pcs)
LED filament bulb	5	1.5 million
SMD bulb	5	2 million
T series bulb	7	1.5 million

Chenxin joins hand with our strategic partner Tsing Hua University, and builds up 2 provincial laboratories.With high technology and advanced equipments, our monthly production capacity is more than 5 million pieces.In this year, we will increase more production lines which will be sufficient to cover the potential client order.For more details please see the chart .

CHENXIN LIGHTING

Lab equipments

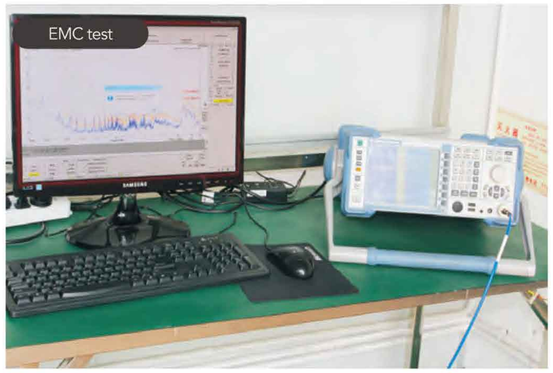
EMC test

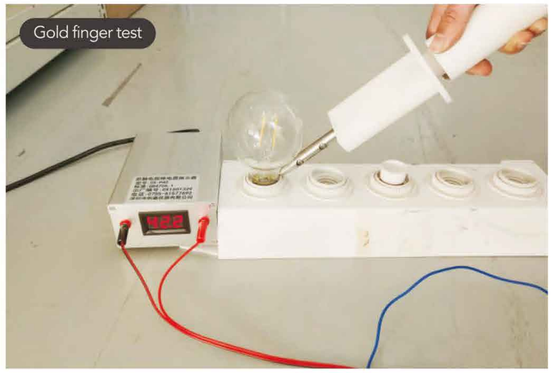
Gold finger test

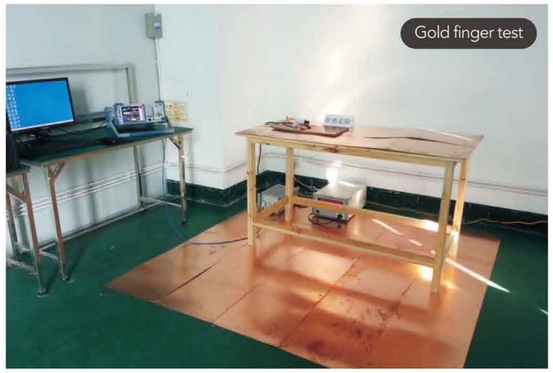
Gold finger test

Low temperature test

Light source test

Thermal shock test

Alternating high and low temp test

Salt spraying test

Light source test

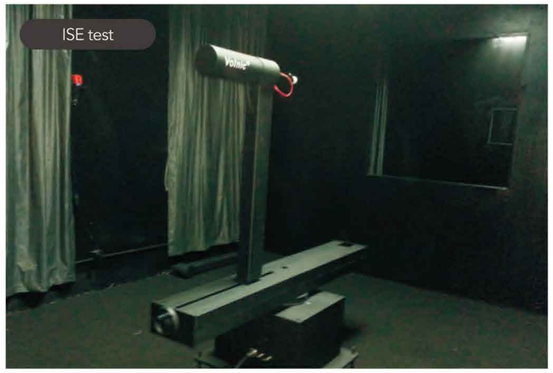
ISE test

Thermal test

Torque test

CHENXIN LIGHTING

How we make a filament bulb?

1. Packaging: produce the filament LED (Most important Process)



The following characters are confirmed, and irreversible.

- CCT
- CRI
- FLUX
- Voltage
- Lifetime of the led filament

2.Bulb molding: put the led filament into the bulb and seal it





The following characters are confirmed, and irreversible.

- Shape and appearance
- Heat dissipation effect

3. Assembly: assemble the driver, socket, and bulb together

The following characters are confirmed, and irreversible.

- Safety performance
- Pass the test for safety certificates such as CE TUV ETL , etc.

All in house

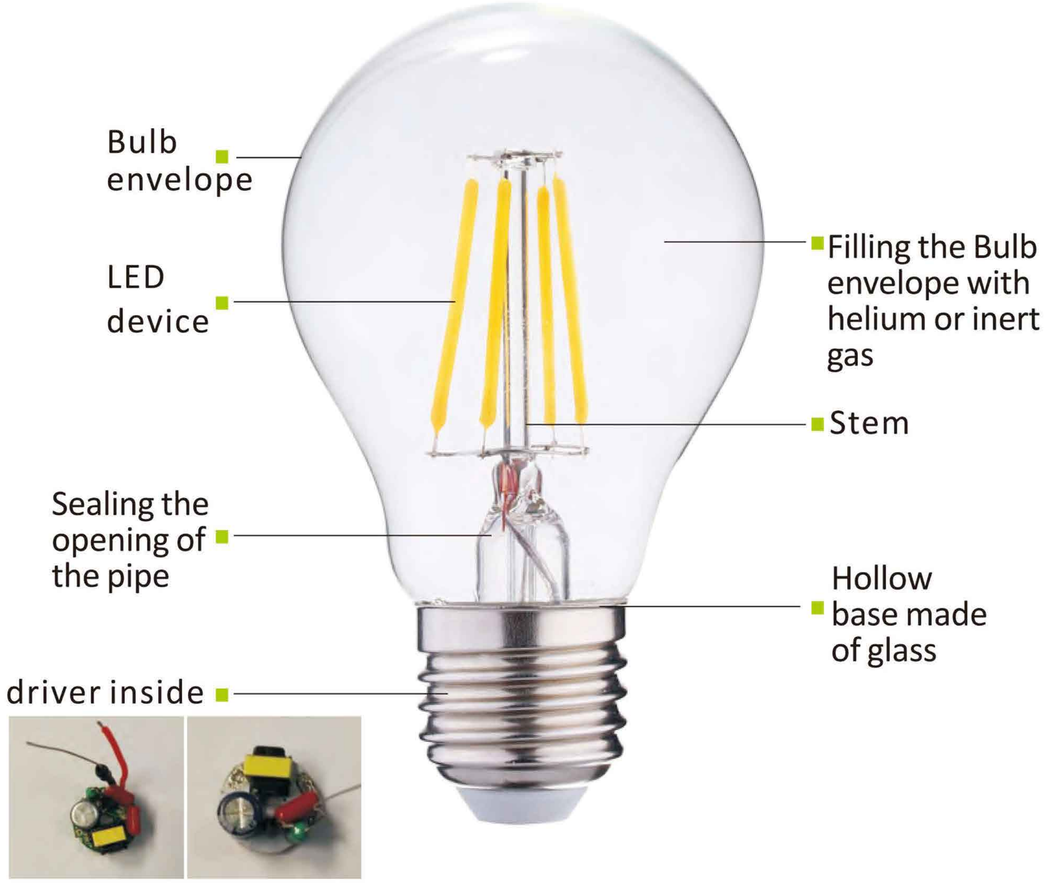

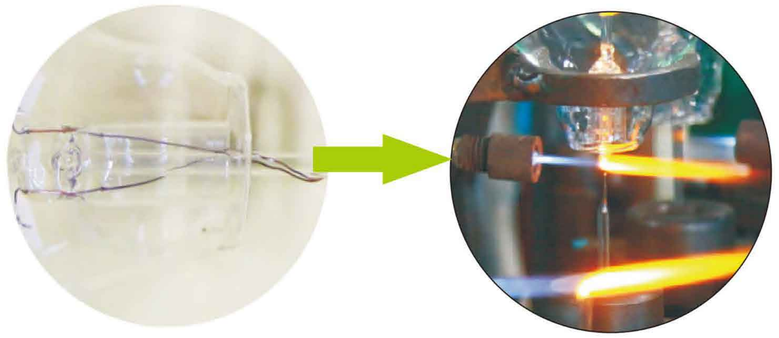

The flange and the neck are melted by a flame

CHENXIN LIGHTING

BASE OF CHINA
EYES ON THE WORLD

Sales Network:

Overseas:

France, Italy, Spain,Germany,Sweden,Russia,Poland,Turkey,Saudi Arabia,America, Brazil,Argentina

Domestic:

Office Address:No.1009,International Business Center B# Block,Huguang RD, Shushan District,Hefei,China

Factory Address:Huoshan County,Lu' an City,Anhui,China

The company has strengthened LED product development and promotion since 2013 and has marketed 8 series of LED products: LED filament lamp, LED bulb, LED T8 light tube, LED T5 self-contained support, LED down light, LED ceiling light, LED miner light, and LED surface-mounted light. The company enriches its product series while maintaining a high product quality level and works to build "CTX" into a star brand in LED lighting sector. Thanks to a sustained lively international market, LED filament lamps, the new generation of LED light, has become a hot-sale product on the international market. Since 2015, the company has kept on augmenting the output and enriching the product series, and by now the production capacity reaches 1.5 million LED filament lamps per month. The company is to intensify the promotion of LED filament lamps on the domestic market and works to become No. 1 LED filament lamp brand by its quality products, competitive price, and diversified product series.

CERTIFICATE
of Conformity
EC Council Directive 2014/30/EU
Electromagnetic Compatibility

Registration No.: AE 50420959 0001
Report No.: 50191265 001

Holder: CHENGDU EVERSTAR LIGHTING CO., LTD
No.288 SOUTH HUXIAN Road,
ZHIHE TOWN, PENGZHOU CITY,
SICHUAN
P. R. China

Product: LED Lamp

Identification:

TÜV Rheinland LGA Products GmbH · Tillystraße 2 · 90431 Nürnberg

CE-EMC

CERTIFICATE
of Conformity
Low Voltage Directive 2014/35/EU

Registration No.: AN 50419801 0001
Report No.: 50180718 001

Holder: CHENGDU EVERSTAR LIGHTING CO., LTD
No.288 SOUTH HUXIAN Road,
ZHIHE TOWN, PENGZHOU CITY,
SICHUAN
P. R. China

Product: LED Lamp

Identification:

TÜV Rheinland LGA Products GmbH · Tillystraße 2 · 90431 Nürnberg

CE-LVD

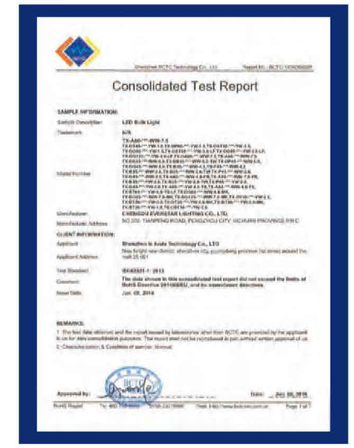
Consolidated Test Report

SAMPLE INFORMATION:

CLIENT INFORMATION:

REMARKS:

ROHS

Test Report

Applicant: CHENGDU EVERSTAR LIGHTING CO. LTD

Sample Name: LED Bulb Light

REACH

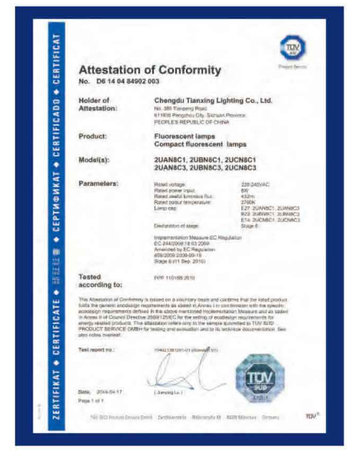
Attestation of Conformity
No. D6 14 04 84902 003

Holder of Attestation: Chengdu Tianxing Lighting Co., Ltd.

Product: Fluorescent lamps
Compact fluorescent lamps

Model(s): 2UAN8C1, 2UBN6C1, 2UCN8C1
2UAN8C3, 2UBN8C3, 2UCN8C3

Parameters:

Tested according to:

ERP

CFL CERTIFICATION CENTER
CERTIFICATION OF QUALITY MANAGEMENT SYSTEM

Registration No: 06516020084ROM

Chengdu Tianxing Zhaoming Electrical Appliances Co., Ltd.

Complies with the requirements of

GB/T19001-2008/ISO 9001: 2008

The scope of certification business covers:

Production of Ordinary Incandescent Bulbs, LED Lamp, Energy-saving Lamps

ISO9001

Producer : CHENGDU EVERSTAR LIGHTING CO., LTD

amfori BSCI
Trade with purpose

Audit Details

Audit Range :	☒ Full Audit	☐ Follow-up Audit	
Audit Scope :	☒ Main Auditee	☐ Main Auditee & Farms	
Audit Environment :	☒ Industrial	☐ Agricultural	☐ Small Producer
Audit Announcement :	☒ Fully-Announced	☐ Fully-Unannounced	☐ Semi-Announced
Random Unannounced Check (RUC) :	No		
Audit extent (if applicable) :	none		
Audit interferences or contingencies (if applicable) :	none		
Overall rating :	C		
Need of follow-up :	Yes	If YES, by :	24/01/2020

Rating per Performance Area (PA)

PA 1	PA 2	PA 3	PA 4	PA 5	PA 6	PA 7	PA 8	PA 9	PA 10	PA 11	PA 12	PA 13
D	A	A	A	A	D	A	A	A	A	A	A	A

EMC tested

ENERGY STAR

LISTED

CONTENT

Part | LED filament bulb

- B35-C35 01
- P45-G45 02
- A60-A70 03
- G80-G95-G125 04
- ST26 05
- T25-T30-T45 06
- ST58-ST64 07
- Top silver-Top gold 08
- R series 09
- 3-step Dim NEW 10
- Sensor 11
- Motion sensor NEW 12
- Flexible filament 13~14
- Decorative filament NEW 15~16
- Color filament 17
- AC/DC12-24V NEW 18
- LED filament bulb 19~20
- CA11-B11 21
- G16-P16 22
- A19 23
- ST18-ST20 G25 G30 G40 24

Part || SMD bulb

- A bulb T bulb 25
- C37 26
- G45 27
- A60-A70 28

Part ||| T series bulb

- T 29
- T 30

B35-C35

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
B35/C35-1	1W±0.3w	100lm±10%	>0.4	E14/B15|E27/B22	NO
B35/C35-2	2W±10%	220lm±10%	>0.4	E14/B15|E27/B22	NO
B35/C35-4	4W±10%	440lm±10%	>0.4	E14/B15|E27/B22	NO
B35/C35-4	5W±10%	600lm±10%	>0.5	E14/B15|E27/B22	NO
NEW B35/C35-4	6.5W±10%	800lm±10%	>0.5	E14/B15|E27/B22	NO
B35/C35-2-Dim	2W±10%	180lm±10%	>0.4	E14/B15|E27/B22	YES
B35/C35-4-Dim	4W±10%	380lm±10%	>0.4	E14/B15|E27/B22	YES
B35/C35-4-Dim	5W±10%	550lm±10%	>0.5	E14/B15|E27/B22	YES
NEW B35/C35-4-Dim	6.5W±10%	720lm±10%	>0.5	E14/B15|E27/B22	YES

Glass color

■Clear ■Frosted
■Amber ■Milky
■Smoky

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Product structure drawing



Qty/ctn:100pcs
meas:B35:430*220*255mm
C35:430*220*395mm



Package

Dimmable

P45-G45

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
P45/G45-1	1W±0.3w	100lm±10%	>0.4	E14/B15|E27/B22	NO
P45/G45-2	2W±10%	220lm±10%	>0.4	E14/B15|E27/B22	NO
P45/G45-4	4W±10%	440lm±10%	>0.4	E14/B15|E27/B22	NO
P45/G45-4	5W±10%	600lm±10%	>0.5	E14/B15|E27/B22	NO
NEW P45/G45-4	6.5W±10%	800lm±10%	>0.5	E14/B15|E27/B22	NO
P45/G45-2-Dim	2W±10%	180lm±10%	>0.4	E14/B15|E27/B22	YES
P45/G45-4-Dim	4W±10%	380lm±10%	>0.4	E14/B15|E27/B22	YES
P45/G45-4-Dim	5W±10%	550lm±10%	>0.5	E14/B15|E27/B22	YES
NEW P45/G45-4-Dim	6.5W±10%	720lm±10%	>0.5	E14/B15|E27/B22	YES

Glass color

■Clear ■Frosted
■Amber ■Milky
■Smoky

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Product structure drawing



Qty/ctn:100pcs
Meas:P45/G45:530*270*210mm



Package

Dimmable

A60-A70

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
A60-1	1W±0.3w	100lm±10%	>0.4	E27/B22	NO
A60-2	2W±10%	220lm±10%	>0.4	E27/B22	NO
A60-4	4W±10%	440lm±10%	>0.4	E27/B22	NO
A60-4	5W±10%	600lm±10%	>0.5	E27/B22	NO
A60-4LF	7W±10%	800lm±10%	>0.5	E27/B22	NO
NEW A60-4LF	8W±10%	1055lm±10%	>0.5	E27/B22	NO
NEW A60-4LF	11W±10%	1350lm±10%	>0.5	E27/B22	NO
NEW A70-4LF	11W±10%	1500lm±10%	>0.4	E27/B22	NO
A60-2-Dim	2W±10%	1801lm±10%	>0.4	E27/B22	YES
A60-4-Dim	4W±10%	3801lm±10%	>0.5	E27/B22	YES
A60-4-Dim	5W±10%	5501lm±10%	>0.5	E27/B22	YES
A60-4-Dim	7W±10%	7201lm±10%	>0.5	E27/B22	YES
NEW A60-4LF-Dim	8W±10%	1055lm±10%	>0.5	E27/B22	YES
NEW A60-4LF-Dim	11W±10%	1350lm±10%	>0.5	E27/B22	YES
NEW A70-4LF-Dim	11W±10%	1500lm±10%	>0.5	E27/B22	YES



Glass color

■Clear ■Frosted
■Amber ■Milky
■Smoky

Product structure drawing



Qty/ctn:100pcs
Meas:A60:680*270*280mm
A70:770*390*330mm



Package

Dimmable

G80-G95-G125

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
G80/G95/G125-4	4W±10%	440lm±10%	>0.4	E27/B22	NO
G80/G95/G125-4	5W±10%	600lm±10%	>0.5	E27/B22	NO
G80/G95/G125-4LF	7W±10%	800lm±10%	>0.5	E27/B22	NO
NEW G80/G95/G125-4LF	8W±10%	1055lm±10%	>0.5	E27/B22	NO
NEW G80/G95/G125-4LF	11W±10%	1350lm±10%	>0.5	E27/B22	NO
NEW G80/G95/G125-4LF	11W±10%	1500lm±10%	>0.5	E27/B22	NO
G80/G95/G125-4-Dim	4W±10%	380lm±10%	>0.5	E27/B22	YES
G80/G95/G125-4-Dim	5W±10%	550lm±10%	>0.5	E27/B22	YES
G80/G95/G125-4-Dim	7W±10%	720lm±10%	>0.5	E27/B22	YES
NEW G80/G95/G125-4LF-Dim	8W±10%	1055lm±10%	>0.5	E27/B22	YES
NEW G80/G95/G125-4LF-Dim	11W±10%	1350lm±10%	>0.5	E27/B22	YES
NEW G80/G95/G125-4LF-Dim	11W±10%	1500lm±10%	>0.5	E27/B22	YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K



Glass color

■Clear ■Frosted
■Amber ■Milky
■Smoky

Product structure drawing



Qty/ctn: G80:80G95: 40 G125:20
Meas:G80:455*335*315mm
G95:530*425*360mm
G125:680*280*420mm



Package

Dimmable

ST26

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
ST26-1	1W±0.5	50lm±10%	>0.4	E14/B15	NO
ST26-2	1.5W±10%	110lm±10%	>0.4	E14/B15	NO
ST26-4	2.5W±10%	280lm±10%	>0.4	E14/B15	NO
ST26-2-Dim	1.5W±10%	110lm±10%	>0.4	E14/B15	YES
ST26-4-Dim	2.5W±10%	230lm±10%	>0.4	E14/B15	YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

■ Clear ■ Frosted
■ Amber ■ Milky
■ Smoky

Product structure drawing



Qty/ctn:200pcs
Meas:ST26:330*175*280mm

Package



Dimmable

T25 T30 T45

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
T25-2	2W±10%	200lm±10%	>0.4	E27/B22	NO
T25-4	4W±10%	400lm±10%	>0.4	E27/B22	NO
T25-2-Dim	2W±10%	180lm±10%	>0.4	E27/B22	YES
T25-4-Dim	4W±10%	350lm±10%	>0.4	E27/B22	YES
T30-4	4W±10%	400lm±10%	>0.4	E27/B22	NO
T30-6	6W±10%	600lm±10%	>0.5	E27/B22	NO
T30-4-Dim	4W±10%	380lm±10%	>0.4	E27/B22	YES
T30-6-Dim	6W±10%	550lm±10%	>0.5	E27/B22	YES
T45-4	4W±10%	400lm±10%	>0.4	E27/B22	NO
T45-4-Dim	4W±10%	380lm±10%	>0.4	E27/B22	YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

■ Clear ■ Frosted
■ Amber ■ Milky
■ Smoky

Product structure drawing



Package

Qty/ctn:100pcs
Meas:T25:360*180*240mm
T30(160mm):375*375*205mm
T30(225):375*375*260mm
T45:530*270*275mm



Dimmable

ST58 ST64

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
ST58/ST64-2	2W±10%	200lm±10%	>0.4	E27/B22	NO
ST58/ST64-4	4W±10%	400lm±10%	>0.4	E27/B22	NO
ST58/ST64-4	5W±10%	600lm±10%	>0.5	E27/B22	NO
ST58/ST64-4LF	7W±10%	800lm±10%	>0.5	E27/B22	NO
ST58/ST64-4-Dim	4W±10%	380lm±10%	>0.5	E27/B22	YES
ST58/ST64-4-Dim	5W±10%	550lm±10%	>0.5	E27/B22	YES
ST58/ST64-4LF-Dim	7W±10%	720lm±10%	>0.5	E27/B22	YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

- Clear
- Frosted
- Amber
- Milky
- Smoky

Product structure drawing



Qty/ctn:60pcs
Meas:ST58:405*340*320mm
455*375*330mm



Package

Dimmable

Top silver-Top gold

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
P45/G45-2-Top silver/Top gold	2W±10%	180lm±10%	>0.4	E14/B15|E27/B22	NO
P45/G45-4-Top silver/Top gold	4W±10%	380lm±10%	>0.4	E14/B15|E27/B22	NO
P45/G45-2-Top silver/Top gold-Dim	2W±10%	150lm±10%	>0.4	E14/B15|E27/B22	YES
P45/G45-4-Top silver/Top gold-Dim	4W±10%	350lm±10%	>0.4	E14/B15|E27/B22	YES
A60-2-Top silver/Top gold	2W±10%	180lm±10%	>0.4	E27/B22	NO
A60-4-Top silver/Top gold	4W±10%	380lm±10%	>0.4	E27/B22	NO
A60-2-Top silver/Top gold-Dim	2W±10%	150lm±10%	>0.4	E27/B22	YES
A60-4-Top silver/Top gold-Dim	4W±10%	350lm±10%	>0.4	E27/B22	YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Package

Qty/ctn:60pcs
Meas:G45/P45:530*270*210mm
A60:680*350*270mm

Dimmable

R series

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
R39-4	2.5W±10%	180lm±10%	>0.4	E14/B15	NO
R39-4-Dim	2.5W±10%	150lm±10%	>0.4	E14/B15	YES
R50-4	4W±10%	320lm±10%	>0.4	E14/B15	NO
R50-4-Dim	4W±10%	300lm±10%	>0.4	E14/B15	YES
R63-4	4W±10%	380lm±10%	>0.4	E27/B22	NO
R63-4-Dim	4W±10%	320lm±10%	>0.4	E27/B22	YES
R80-4	4W±10%	380lm±10%	>0.4	E27/B22	NO
R80-4-Dim	4W±10%	360lm±10%	>0.4	E27/B22	YES
R80-4LF	7W±10%	720lm±10%	>0.5	E27/B22	NO
R80-4LF-Dim	7W±10%	580lm±10%	>0.5	E27/B22	YES

Glass color

■Clear ■Frosted

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Product structure drawing

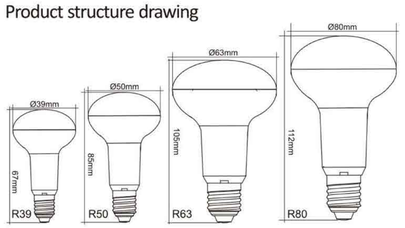

Package

Qty/ctn:R39 80pcs
R50/R63/R80 60pcs
Meas:R39:390*250*180mm
R50:335*285*225mm
R63:450*380*245mm
R80:540*450*270mm

Dimmable

3-step-Dim

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
3-Step Dimming	4W±10%	400lm-200lm-100lm	>0.4	E14/B15|E27/B22	YES
3-Step Dimming	5W±10%	500lm-275lm-137lm	>0.5	E14/B15|E27/B22	YES
3-Step Dimming	6.5W±10%	800lm-400lm-200lm	>0.5	E27/B22	YES



Glass type

■B35 ■C35 ■P45 ■A60
■ST58 ■ST64
■G80 ■G95 ■G125

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Sensor

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
A60-4 sensor	4.2W±10%	400lm±10%	0.4	E27	NO
A60-6 sensor	7.0W±10%	720lm±10%	0.4	E27	NO
T45-4 sensor	4.2W±10%	350lm±10%	0.4	E27	NO
ST64-4 sensor	4.2W±10%	400lm±10%	0.4	E27	NO
ST64-6 sensor	7.0W±10%	720lm±10%	0.4	E27	NO

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

■Clear ■Frosted

■Amber ■Milky

Sensor filament light

Automatically controlled by the light, when it gets darker the sensor bulb turned on. And when it comes bright the sensor bulb off again. With the technology of built in light sensor, the lamp canprotect itself. Also because the light sensor has a time delay, it doesn't turn on or off by the temporary darkness or brightness.

SENSOR ON OFF

LIGHTS UP WHEN DARK

Motion sensor

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
A60-8-motion sensor	4.0W±10%	400lm±10%	0.4	E27/B22	NO

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

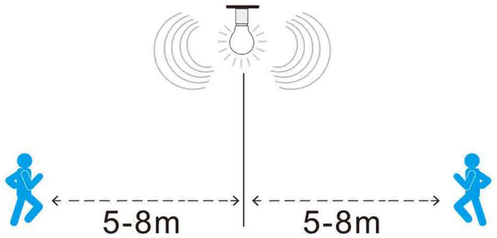

Flexible filament

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
B35/C35-S-130mm	2.3W±10%	130lm±10%	>0.4	E27/B22|E14/B15	NO/YES
G45/P45-S-130mm	2.3W±10%	130lm±10%	>0.4	E27/B22|E14/B15	NO/YES
A60-S-130mm	2.3W±10%	130lm±10%	>0.4	E27/B22	NO/YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

■Clear ■Frosted
■Amber ■Smoky

Dimmable

Flexible filament

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
ST64-S-230mm	4W±10%	150lm±10%	>0.5	E27/B22	NO/YES
ST64-S-300mm	4W±10%	230lm±10%	>0.5	E27/B22	NO/YES
G95-S-230mm	4W±10%	150lm±10%	>0.5	E27/B22	NO/YES
G95-S-300mm	4W±10%	230lm±10%	>0.5	E27/B22	NO/YES
G125-S-230mm	4W±10%	150lm±10%	>0.5	E27/B22	NO/YES
G125-S-300mm	4W±10%	230lm±10%	>0.5	E27/B22	NO/YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

■Clear ■Frosted
■Amber ■Smoky

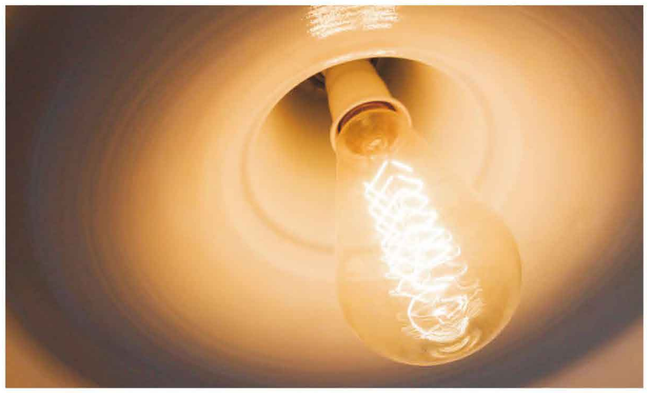

Dimmable

Decorative filament

Technical Parameters

Name	Watts	Flux	Base type	Dimmable
G45/P45-U-40mm	0.8w±0.3	60lm	E27/B22|E14/B15	NO
A60-U-40mm	0.8w±0.3	60lm	E27/B22	NO
G95- tree	/	/	E27/B22	NO
G95-Star	/	/	E27/B22	NO
G125-Love	/	/	E27/B22	NO
G125-Home	/	/	E27/B22	NO

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80

Glass color

■Clear ■Frosted

■Amber

Decorative filament

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
A60-Copper wire/RGB flash	1	/	>0.4	E27/B22	NO/YES
A60-3D	1	/	>0.4	E27/B22	NO/YES
A60-3D	3	/	>0.4	E27/B22	NO/YES
ST64-Copper wire/RGB flash	1	/	>0.4	E27/B22	NO/YES
ST64-3D	1	/	>0.4	E27/B22	NO/YES
ST64-3D	3	/	>0.4	E27/B22	NO/YES
G95-Copper wire/rgb flash	1	/	>0.4	E27/B22	NO/YES
G95-3D	1	/	>0.4	E27/B22	NO/YES
G95-3D	3	/	>0.4	E27/B22	NO/YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80

Color filament

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
S14-1-color	1W±0.5	/	/	E27/B22	NO
S14-1-color	2W±10%	/	/	E27/B22	NO
A60-1-color	1W±0.5	/	/	E27/B22	NO
A60-2-color	2W±10%	/	/	E27/B22	NO
A60-4-color	4W±10%	/	/	E27/B22	NO

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80

Color

- Red
- Orange
- Green
- Violet
- blue

AC/DC12-24V

Technical Parameters

Name	Flux	PF	Base type	Dimmable
B35/C35/P45-2	150lm±10%	>1.0	E14	NO
B35/C35/P45-4	250lm±10%	>1.0	E14	NO
G45/A60-2	150lm±10%	>1.0	E27	NO
G45/A60-4	250lm±10%	>1.0	E27	NO

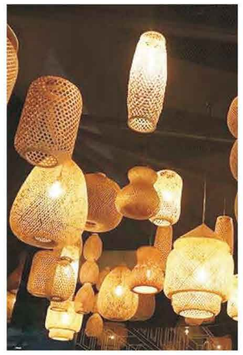

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

- Clear
- Frosted
- Amber
- Milky
- Smoky

American Standard LED filament bulbs

CA11 B11

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
CA11-2	2.5W	200lm	0.9	E12/E26	YES
CA11-4	4.5W	380lm	0.9	E12/E26	YES
B11-2	2.5W	200lm	0.9	E12/E26	YES
B11-4	4.5W	380lm	0.9	E12/E26	YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

- Clear
- Frosted
- Amber
- Milky
- Smoky

Dimmable

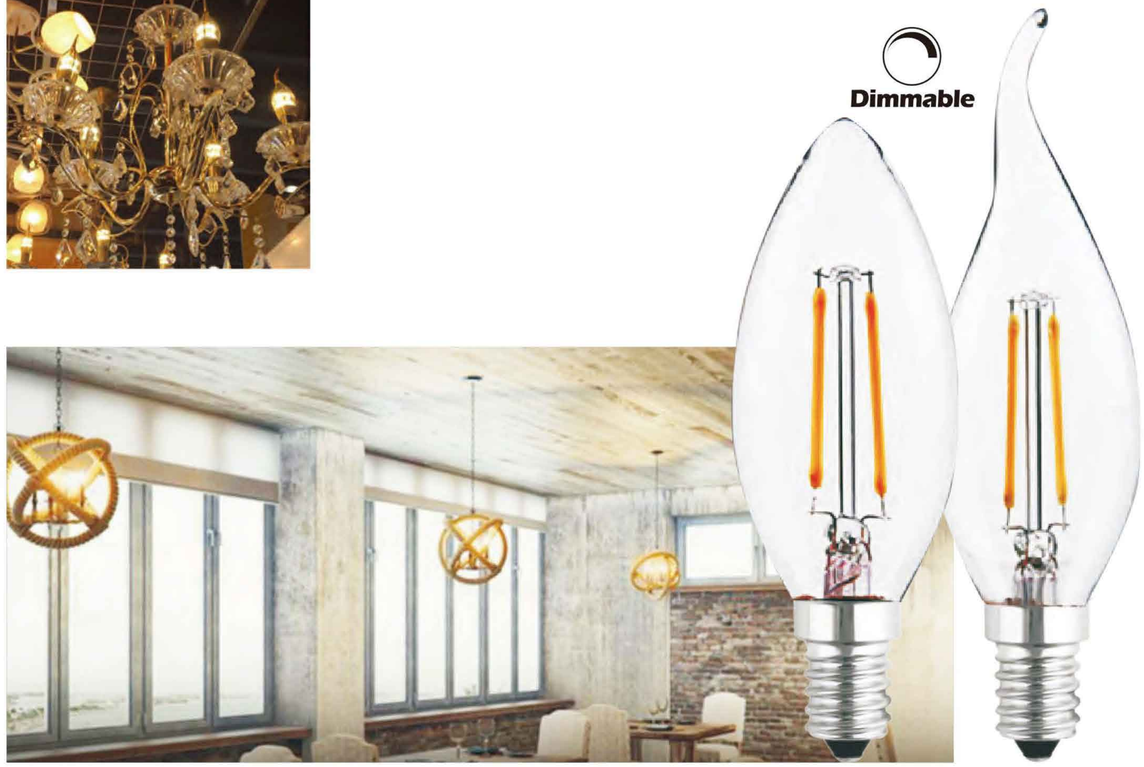

G16 P16

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
G16-2	2.5W	200lm	0.9	E26	YES
G16-4	4.5W	380lm	0.9	E26	YES
P16-2	2.5W	200lm	0.9	E12	YES
P16-4	4.5W	380lm	0.9	E12	YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

- Clear
- Frosted
- Amber
- Milky
- Smoky

Dimmable

A19

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
A19-2	2.5W	200lm	0.9	E26	YES
A19-4	4.5W	380lm	0.9	E26	YES
A19-4LF	6.5W	806lm	0.9	E26	YES
A19-4LF	8.0W	1055lm	0.9	E26	YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

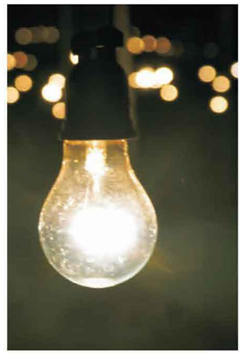

Glass color

- Clear
- Frosted
- Amber
- Milky
- Smoky

Dimmable

ST18 ST20 G25 G30 G40

Technical Parameters

Name	Watts	Flux	PF	Base type	Dimmable
ST18/ST20-4	4.5W	380lm	0.9	E26	YES
ST18/ST20-4LF	6.5W	806lm	0.9	E26	YES
ST18/ST20-4LF	8.0W	1055lm	0.9	E26	YES
G25/G30/G40-4	4.5W	380lm	0.9	E26	YES
G25/G30/G40-4LF	6.5W	806lm	0.9	E26	YES
G25/G30/G40-4LF	8.0W	1055lm	0.9	E26	YES

GARANTIE 2 YEARS | 360° | 25000 H | ≥ x12.500 ON/OFF | AC 200-240V | 100% 0 sec | HG = 0,0mg | Ra ≥80 | 2100K 2700K 4000K 6400K

Glass color

- Clear
- Frosted
- Amber
- Milky
- Smoky
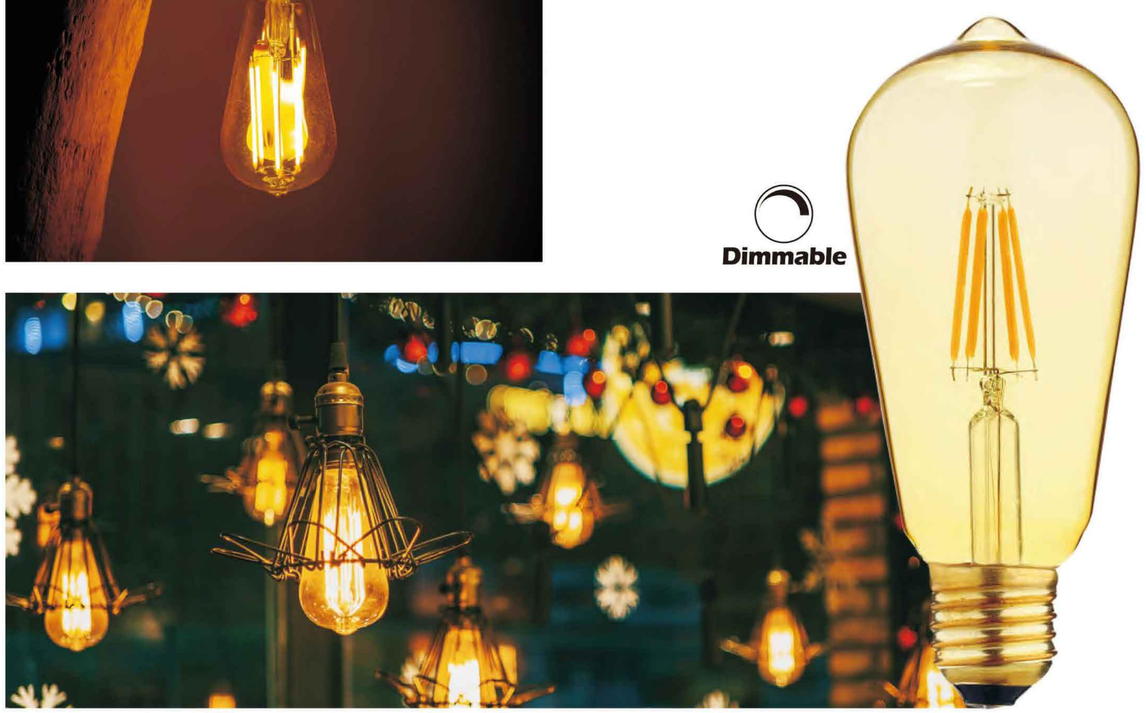
Dimmable