



CX Lighting

ANHUI CHENXIN LIGHTING
ELECTRICAL APPLIANCE CO.,LTD

Office address:No. 1009,Internation business center B# block, Huguang RD.
Sushan District, Hefei,China
Factory Address:Huoshan country,Lu'an city,Anhui,China
Tel:+86-551-65856715 Cell:+86-181119606995
Email:cxlight@ahcxlight.com Web:www.ahcxlight.com
<https://ahcxlight.en.made-in-China.com> <https://ahcxlight.en.alibaba.com>

About us




Anhui Chenxin Lighting Electrical Appliance Co., Ltd, headquartered in Anhui, China, is a professional large-scale manufacturer of all types of Lighting products established with 20 years of solid experience in the lighting industry. As a leading domestic manufacturer of LED Lighting products, Integrates development and manufacturing in-house. Specializes in manufacturing LED various lamps, LED filament bulbs, LED panel lights, LED Corn bulbs and T8 LED Glass tubes, Luxury Light, Holiday Light & Garden Light, Solar Light, Stage Light and Customized products.

Our factory covers 500,000 m² With more than 2,000 skilled workers and lighting professions supporting 45 production lines and key company functions Through our online B2B platforms (Made-in-China, Global sources) and physical sales channels based in major cities of China, we export to more than 60 countries, including United States, Brazil, Mexico, Germany, Spain, UK, South Africa, Iran, Israel, Pakistan etc. By insisting our mission, "Creating value for clients, Offering opportunities to staff, Bringing wealth to society", we expect to achieve wonderful success with all of our partners with our superior products, reputation and services.



Company History:

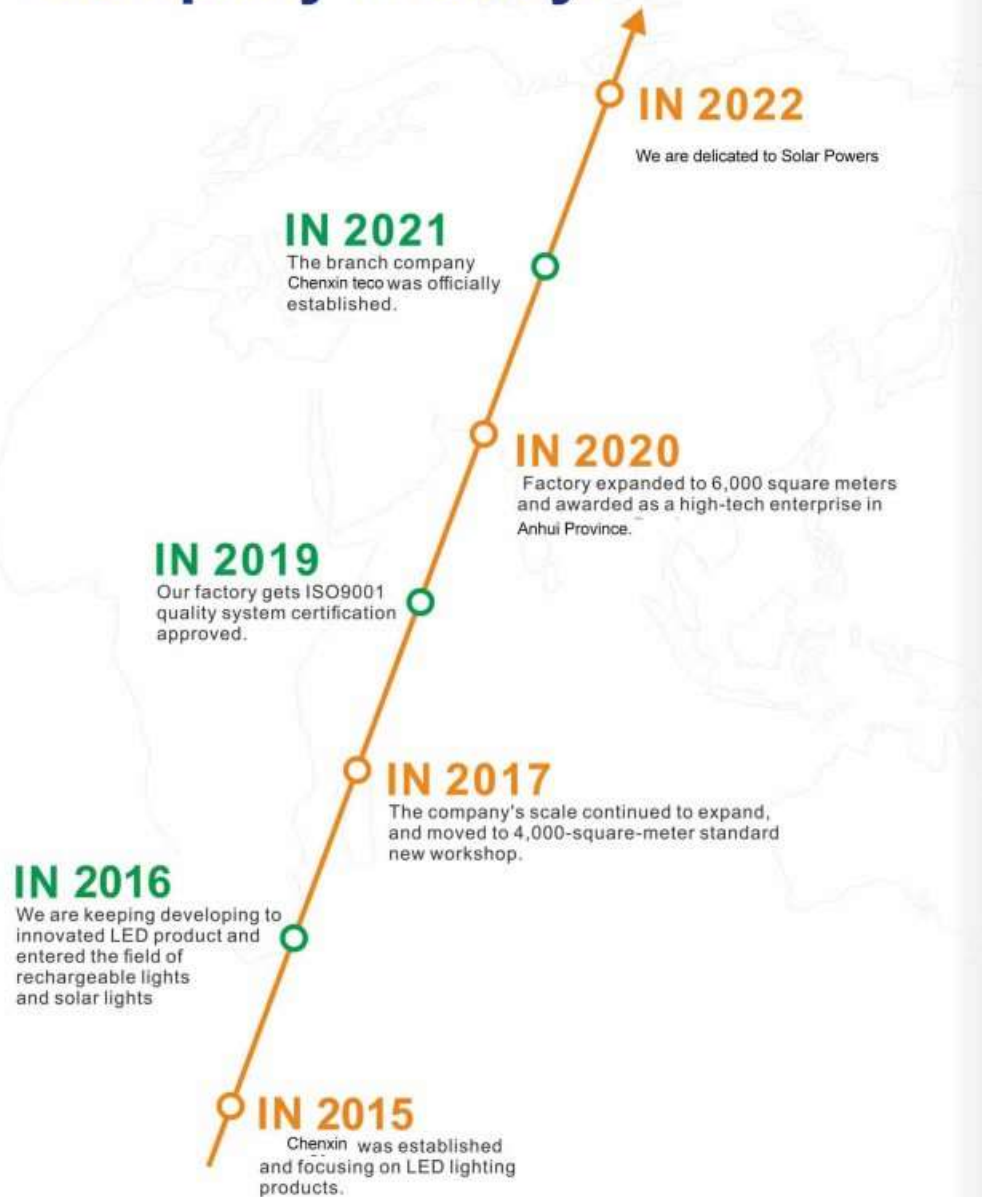

CONTENTS

ALL IN ONE SOLAR STREET LIGHT	01~11
SOLAR STREET LIGHT	12~14
SOLAR BLUETOOTH MUSIC LIGHT	15~16
ALL IN ONE SOLAR RECHARGEABLE FLOOD LIGHT	17
RECHARGEABLE FLOOD LIGHT	18~22
SOLAR FLOOD LIGHT	23~29
SOLAR GARDEN LIGHT	30
CAMPING LIGHT	31
SOLAR WALL LIGHT	32
SOLAR LED STRIP	33
SOLAR LAWN LIGHT	34~36
RECHARGEABLE FAN	37~38
SOALR FAN	39~41
FLOOD LIGHT	42
STREET LIGHT	43
TRIPOD STAND	44

ALL IN ONE SOLAR STREET LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-A-30W	ABS+Polysilicon	12hours	390x195x55MM
GY-SSL-A-60W	ABS+Polysilicon	12hours	485x220x55MM
GY-SSL-A-90W	ABS+Polysilicon	12hours	620x240x55MM
GY-SSL-A-120W	ABS+Polysilicon	12hours	720x240x55MM
GY-SSL-A-150W	ABS+Polysilicon	12hours	820x240x55MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-B-120W	ABS+Polysilicon	12hours	235x62x503MM
GY-SSL-B-150W	ABS+Polysilicon	12hours	237x62x610MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



- 01** ALUMINUM REFLECTOR
Super efficient process, higher light, lower the temperature of light.
- 02** ABS INTEGRATED HOUSING
High strength, high impact resistance, anti-UV, anti-corrosion.
- 03** THICKEN POLY-ARM ATTACHMENT
Special of casting, anti-shattering, easy to install for a variety of pole and accessories, easy to use.

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-C-30W	ABS+Polysilicon	12hours	300x210x60MM
GY-SSL-C-60W	ABS+Polysilicon	12hours	395x205x60MM
GY-SSL-C-90W	ABS+Polysilicon	12hours	500x235x80MM
GY-SSL-C-120W	ABS+Polysilicon	12hours	635x255x70MM
GY-SSL-C-150W	ABS+Polysilicon	12hours	740x255x70MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve, Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



- 01** All-impregnating heat-conducting anti-rust.
- 02** High transmittance PC lens/plastic.
- 03** The light source is the whole using anti-rust coating.

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-I-120W	ABS+Polysilicon	12hours	520x230x50MM
GY-SSL-I-180W	ABS+Polysilicon	12hours	630x246x50MM
GY-SSL-I-240W	ABS+Polysilicon	12hours	730x250x50MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve, Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



- 01 HIGH BRIGHTNESS LED CHIP
220 high brightness LED chips, super brightness, long service life.
- 02 THICKENED ABS PLASTIC SHELL
High quality ABS plastic shell, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- 03 THICKEN STANDARD LAMPPOST HUB
Safe and durable, and easy to install.

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-J-180W	ABS+Polysilicon	12hours	447x70x342MM
GY-SSL-J-240W	ABS+Polysilicon	12hours	597x70x342MM
GY-SSL-J-300W	ABS+Polysilicon	12hours	677x70x342MM
GY-SSL-J-360W	ABS+Polysilicon	12hours	760x70x342MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



- 01 Super bright and high efficiency grade A+ LED
- 02 Aluminum alloy housing, anti-rust and outdoor
- 03 Aluminum alloy base, and easy to install

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-K-60W	Die-cast aluminum+Polysilicon	12hours	520x240x65MM
GY-SSL-K-120W	Die-cast aluminum+Polysilicon	12hours	630x270x75MM
GY-SSL-K-180W	Die-cast aluminum+Polysilicon	12hours	750x290x75MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



01 INTEGRATED OPTICAL LENS
Optical lens design, high light uniformity, high efficiency, good color rendering.

02 MONOCRYSTALLINE SILICON SOLAR PANEL
High efficiency, long life span, low temperature coefficient.

03 THICKENED PCB ARM INTERFACE
Thickened PCB arm interface, can be used for a variety of pole arm sizes, easy to install.

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-L-30W	Die-cast aluminum+Polysilicon	12hours	370x180x55MM
GY-SSL-L-60W	Die-cast aluminum+Polysilicon	12hours	470x200x55MM
GY-SSL-L-90W	Die-cast aluminum+Polysilicon	12hours	600x210x55MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



01 INTEGRATED OPTICAL LENS
Optical lens design, high light uniformity, high efficiency, good color rendering.

02 PLASTIC HOUSING
High efficiency, long life span, low temperature coefficient.

03 THICKENED PCB ARM INTERFACE
Thickened PCB arm interface, can be used for a variety of pole arm sizes, easy to install.

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-T-100W	ABS+Polysilicon	12hours	345x445x65MM
GY-SSL-T-150W	ABS+Polysilicon	12hours	345x445x65MM
GY-SSL-T-200W	ABS+Polysilicon	12hours	345x445x65MM
GY-SSL-T-300W	ABS+Polysilicon	12hours	630x347x67MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



PRODUCT TECHNICAL PARAMETERS


Model	Material	Working time	Size
GY-SSL-M-15W	Aluminum+Polysilicon	12hours	688x300x43MM
GY-SSL-M-25W	Aluminum+Polysilicon	12hours	828x300x43MM
GY-SSL-M-50W	Aluminum+Polysilicon	12hours	1078x426x43MM
GY-SSL-M-60W	Aluminum+Polysilicon	12hours	1306x426x50MM
GY-SSL-M-80W	Aluminum+Polysilicon	12hours	1468x426x50MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-M01-300W	Aluminum+Polysilicon	12hours	887x400x280MM
GY-SSL-M01-400W	Aluminum+Polysilicon	12hours	1160x400x280MM
GY-SSL-M01-500W	Aluminum+Polysilicon	12hours	1435x400x280MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-M02-50W	Aluminum+Polysilicon	12hours	500x220x45MM
GY-SSL-M02-100W	Aluminum+Polysilicon	12hours	700x220x45MM
GY-SSL-M02-150W	Aluminum+Polysilicon	12hours	900x220x45MM
GY-SSL-M02-200W	Aluminum+Polysilicon	12hours	1000x220x45MM
GY-SSL-M02-250W	Aluminum+Polysilicon	12hours	1100x220x45MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



ALL IN ONE SOLAR STREET LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-M03-50W	Die-cast aluminum+Polysilicon	12hours	500x210x60MM
GY-SSL-M03-100W	Die-cast aluminum+Polysilicon	12hours	500x210x60MM
GY-SSL-M03-150W	Die-cast aluminum+Polysilicon	12hours	500x210x60MM
GY-SSL-M03-200W	Die-cast aluminum+Polysilicon	12hours	500x210x100MM
GY-SSL-M03-300W	Die-cast aluminum+Polysilicon	12hours	500x210x100MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- High intensity tempered glass, its luminous efficiency up to 95%.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



SOLAR STREET LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-M04-60W	Die-cast aluminum+Polysilicon	12hours	520x210x70MM
GY-SSL-M04-100W	Die-cast aluminum+Polysilicon	12hours	520x210x70MM
GY-SSL-M04-200W	Die-cast aluminum+Polysilicon	12hours	520x210x70MM
GY-SSL-M04-300W	Die-cast aluminum+Polysilicon	12hours	520x210x70MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



SOLAR STREET LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SSL-M05-100W	Aluminum+Polysilicon	12hours	495x213x55MM
GY-SSL-M05-200W	Aluminum+Polysilicon	12hours	495x213x55MM
GY-SSL-M05-300W	Aluminum+Polysilicon	12hours	600x250x80MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%. With high safety factor.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- PC outdoor optical lens, high light transmittance.



SOLAR BLUETOOTH MUSIC LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SML-100W	ABS+Polysilicon	8-10hours	200x50x315MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Unique handle design, easy to carry, more non-slip.
- High-power speakers, no loss of extraordinary sound quality, pure sound quality, no distortion. Bring you the real feeling of being in a concert. Using Bluetooth 5.0 chip signal. The transmission is farther, faster, with lower power consumption, and the device is more stable.
- A variety of charging methods. No matter when and where, you don't have to worry about running out of battery. Multi-level dimming control, adapt to different environmental brightness requirements, and can also play an emergency warning role.



SOLAR BLUETOOTH MUSIC LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SBL-A-100W	ABS+Polysilicon	4-8hours	260x240x45MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- High-power speakers, no loss of extraordinary sound quality, pure sound quality, no distortion. Bring you the real feeling of being in a concert. Using Bluetooth 5.0 chip signal. The transmission is farther, faster, with lower power consumption, and the device is more stable.
- A variety of charging methods. No matter when and where, you don't have to worry about running out of battery. Multi-level dimming control, adapt to different environmental brightness requirements, and can also play an emergency warning role.



ALL IN ONE SOLAR RECHARGEABLE FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-RFL-B-100W	Aluminum	8-16 hours	223x340x60MM
GY-RFL-B-200W	Aluminum	8-16 hours	270x340x60MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- High intensity tempered glass, its luminous efficiency up to 95%.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



RECHARGEABLE FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-RFL-A-50W	Aluminum	4/8/16 hours	275x215x50MM
GY-RFL-A-100W	Aluminum	4/8/16 hours	223x340x60MM
GY-RFL-A-200W	Aluminum	4/8/16 hours	270x340x60MM
GY-RFL-A-300W	Aluminum	4/8/16 hours	305x367x70MM

PRODUCT ADVANTAGES AND FEATURES

- Professional outdoor painting, stainless steel components, giving excellent performance in anti-corrosion and anti-rusting, widely used in different environment.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- High intensity tempered glass, its luminous efficiency up to 95%.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



RECHARGEABLE FLOOD LIGHT



01 THE BEST ALUMINUM ALLOYING
 Light is 100% aluminum, excellent heat dissipation, excellent heat dissipation performance, high performance of heat.

02 WATERPROOF SLIDING SWITCH
 Waterproof switch, no risk of water being sprayed, great safety.

03 WATERPROOF CHARGING DE FEEL
 Two levels of charging protection, vehicle impacted charging and protection of charging, will not affect the working state of power when the car is on.

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-RFL-C-10W	Aluminum	4/8 hours	145x165x240MM
GY-RFL-C-20W	Aluminum	4/8 hours	180x185x290MM
GY-RFL-C-30W	Aluminum	4/8 hours	225x185x330MM
GY-RFL-C-50W	Aluminum	4/8 hours	285x205x350MM
GY-RFL-C-100W	Aluminum	4/8 hours	320x205x340MM
GY-RFL-C-200W	Aluminum	4/8 hours	425x230x420MM
GY-RFL-C-300W	Aluminum	4/8 hours	460x230x420MM

PRODUCT ADVANTAGES AND FEATURES

- Professional outdoor painting, stainless steel components, giving excellent performance in anti-corrosion and anti-rusting, widely used in different environment.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED COB, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- High intensity tempered glass, its luminous efficiency up to 95%.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



RECHARGEABLE FLOOD LIGHT



01 High brightness and chips

02 Includes 360 degrees

03 Includes 170 degrees

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SBL-C-10W	Aluminum	4 hours	120x40x260MM
GY-SBL-C-20W	Aluminum	4 hours	185x45x335MM
GY-SBL-C-30W	Aluminum	4 hours	230x50x375MM
GY-SBL-C-50W	Aluminum	4 hours	285x60x415MM

PRODUCT ADVANTAGES AND FEATURES

- Professional outdoor painting, stainless steel components, giving excellent performance in anti-corrosion and anti-rusting, widely used in different environment.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED COB, with 50,000 hrs life span.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- High intensity tempered glass, its luminous efficiency up to 95%.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



RECHARGEABLE FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SBL-B-60W	Die-cast aluminum+PC	4-8hours	165x190x50MM
GY-SBL-B-100W	Die-cast aluminum+PC	4-8hours	185x235x50MM
GY-SBL-B-200W	Die-cast aluminum+PC	4-8hours	230x290x50MM

PRODUCT ADVANTAGES AND FEATURES

- Professional outdoor painting, stainless steel components, giving excellent performance in anti-corrosion and anti-rusting, widely used in different environment.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- PC outdoor optical lens, high light transmittance.
- High quality aluminum, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- Diamond surface reflection process design, super efficient reflection Light source, effectively improve lighting brightness.



RECHARGEABLE FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SBL-D-D5	ABS	4/6/8/10hours	114x114x45MM
GY-SBL-D-D6	ABS	4/6/8/10hours	139.5x139.5x45MM
GY-SBL-D-D8	ABS	4/6/8/10hours	210x170x55MM
GY-SBL-D-D9	ABS	4/6/8/10hours	210x170x55MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens, high light transmittance.



SOLAR FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-KFL-A-25W	Aluminum+Polysilicon	12hours	190x145x45MM
GY-KFL-A-40W	Aluminum+Polysilicon	12hours	225x180x50MM
GY-KFL-A-60W	Aluminum+Polysilicon	12hours	250x205x63MM
GY-KFL-A-100W	Aluminum+Polysilicon	12hours	300x250x75MM
GY-KFL-A-200W	Aluminum+Polysilicon	12hours	335x270x80MM
GY-KFL-A-300W	Aluminum+Polysilicon	12hours	395x310x80MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ Polycrystalline solar panel Photoelectric Conversion efficiency is up to 21.3%.
- Lithium-ion iron battery recycle up to 2000 times.
- 50,000 hours lifespan high lumen LED SMD.
- Aluminum body ensures good heatsink and IP65 guard rate.
- Aluminum reflector spreads light widely.
- Easy to replace battery body design.



SOLAR FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-KFL-D-25W	Aluminum+Polysilicon	12hours	190x145x45MM
GY-KFL-D-40W	Aluminum+Polysilicon	12hours	225x180x50MM
GY-KFL-D-60W	Aluminum+Polysilicon	12hours	250x205x63MM
GY-KFL-D-100W	Aluminum+Polysilicon	12hours	300x250x75MM
GY-KFL-D-200W	Aluminum+Polysilicon	12hours	335x270x80MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ Polycrystalline solar panel Photoelectric Conversion efficiency is up to 21.3%.
- Lithium-ion iron battery recycle up to 2000 times.
- 50,000 hours lifespan high lumen LED SMD.
- Aluminum body ensures good heatsink and IP65 guard rate.
- Honeycomb unique reflector design and battery remaining indicator display.
- Easy to replace battery body design.



SOLAR FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-KFL-E-50W	ABS+Polysilicon	12hours	245x230x50MM
GY-KFL-E-100W	ABS+Polysilicon	12hours	245x230x50MM
GY-KFL-E-200W	ABS+Polysilicon	12hours	300x260x60MM
GY-KFL-E-300W	ABS+Polysilicon	12hours	345x310x60MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ Polycrystalline solar panel Photoelectric Conversion efficiency is up to 21.3%.
- Lithium-ion iron battery recycle up to 2000 times.
- 50,000 hours lifespan high lumen LED SMD.
- ABS all in one body design makes guard rate up to IP66, especially good for rainy area.
- Aluminum grid reflector spreads light wildly and spot brighter.



SOLAR FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-KFL-B-50W	Aluminum+Polysilicon	12hours	225x230x60MM
GY-KFL-B-100W	Aluminum+Polysilicon	12hours	270x210x55MM
GY-KFL-B-200W	Aluminum+Polysilicon	12hours	300x240x65MM
GY-KFL-B-300W	Aluminum+Polysilicon	12hours	300x240x65MM
GY-KFL-B-400W	Aluminum+Polysilicon	12hours	450x360x80MM
GY-KFL-B-600W	Aluminum+Polysilicon	12hours	450x360x80MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ Polycrystalline solar panel Photoelectric Conversion efficiency is up to 21.3%.
- Lithium-ion iron battery recycle up to 2000 times.
- 50,000 hours lifespan high lumen LED SMD 5730.
- Aluminum body ensures good heatsink and IP65 guard rate
- Aluminum reflector spreads light wildly.



SOLAR FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-KFL-C-60W	Aluminum+Polysilicon	12hours	185x165x50MM
GY-KFL-C-100W	Aluminum+Polysilicon	12hours	233x182x50MM
GY-KFL-C-200W	Aluminum+Polysilicon	12hours	290x230x50MM
GY-KFL-C-300W	Aluminum+Polysilicon	12hours	360x260x50MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ Polycrystalline solar panel Photoelectric Conversion efficiency is up to 21.3%.
- Lithium-ion iron battery recycle up to 2000 times.
- 50,000 hours lifespan high lumen LED SMD 3030.
- Aluminum body ensures good heatsink and IP65 guard rate
- PC condenser lens makes light extend longer and brighter.



SOLAR FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-KFL-G-50W	Aluminum+Polysilicon	12hours	185x163x50MM
GY-KFL-G-100W	Aluminum+Polysilicon	12hours	237x204x55MM
GY-KFL-G-200W	Aluminum+Polysilicon	12hours	249x289x55MM
GY-KFL-G-300W	Aluminum+Polysilicon	12hours	294x330x55MM
GY-KFL-G-400W	Aluminum+Polysilicon	12hours	376x407x55MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery,the discharge depth reaches 95%. With high safety factor.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality aluminum,anti-corrosion, substantial,durable,artistic, practical. High craft manifesting production value of famous brand.
- PC outdoor optical lens,high light transmittance.



SOLAR FLOOD LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-KFL-F-10W	Aluminum+Polysilicon	12hours	240x145x165MM
GY-KFL-F-20W	Aluminum+Polysilicon	12hours	188x180x130MM
GY-KFL-F-30W	Aluminum+Polysilicon	12hours	225x125x220MM
GY-KFL-F-50W	Aluminum+Polysilicon	12hours	285x145x235MM

PRODUCT ADVANTAGES AND FEATURES

- Outdoor Led Solar Light has built-in LiFePo4 battery, 2000 times recycle.
- Solar powered light, easy for installation.
- Auto work design, one time set up, all done.
- Sensitive photocell sensor sense dan and night easily
- Great useful lighting for your garden, yard, aisle, porch, patio, driveway etc.
- Green power, green lighting.



SOLAR GARDEN LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-KFL-D-100W	ABS+Polysilicon	12hours	420x125MM
GY-KFL-D-200W	ABS+Polysilicon	12hours	420x125MM

PRODUCT ADVANTAGES AND FEATURES

- Solar power built-in LiFePo4 battery, 2000 times recycle.
- Easy to install on pole.
- ABS all in one integrated design.
- Professional light distribution for wide lighting.
- Full charge provide 3 to 4 rainy days lighting.
- Poly Solar Panel, PIR Motion Sensor.



CAMPING LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-LYD-01	ABS+Polysilicon	8hours	230x230x110MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%. With high safety factor.
- High lumen LED SMD, with 50,000 hrs life span.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manufacturing production value of famous brand.
- PC outdoor optical lens, high light transmittance.
- Tri-color dimming + USB output + solar panel charging.



SOLAR WALL LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SGL-A-001	ABS+Polysilicon	12hours	130x95x50MM
GY-SGL-A-002	ABS+Polysilicon	12hours	180x120x50MM
GY-SGL-A-003	ABS+Polysilicon	12hours	145x90x50MM

PRODUCT ADVANTAGES AND FEATURES

- Outdoor Led Solar Light Has Three Motion Sensor Modes.
- Solar powered light, easy for installation.
- Auto work, one time set up and all done
- Sensitive motion sensor detect movement easily
- Great useful lighting for your garden, yard, aisle, porch, patio, driveway etc.
- Green power, green lighting.



SOLAR LED LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SS-001	PVC+Polysilicon	8-10hours	12 inches

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium iron phosphate battery, the discharge depth reaches 95%, With high safety factor.
- High lumen LED SMD, with 50,000 hrs life span.
- IP65 waterproof design, no fear of harsh environment.



SOLAR LAWN LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SGL-C-001	ABS+Polysilicon	12hours	240x800MM
GY-SGL-C-002	ABS+Polysilicon	12hours	260x800MM
GY-SGL-C-003	ABS+Polysilicon	12hours	300x600MM

PRODUCT ADVANTAGES AND FEATURES

- Outdoor Led Solar Light has built-in LiFePo4 battery, 2000 times recycle.
- Solar powered light, easy for installation.
- Auto work design, one time set up, all done.
- Sensitive photocell sensor sense day and night easily
- Great useful lighting for your garden, yard, aisle, porch, patio, driveway etc.
- Green power, green lighting.



SOLAR LAWN LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SGL-E-001	ABS+Polysilicon	12hours	160x213MM
GY-SGL-E-002	ABS+Polysilicon	12hours	160x213MM
GY-SGL-E-003	ABS+Polysilicon	12hours	160x213MM
GY-SGL-E-004	ABS+Polysilicon	12hours	160x213MM

PRODUCT ADVANTAGES AND FEATURES

- Outdoor Led Solar Light has built-in LiFePo4 battery, 2000 times recycle.
- Solar powered light, easy for installation.
- Auto work design, one time set up, all done.
- Sensitive photocell sensor sense dan and night easily
- Great useful lighting for your garden, yard, aisle, porch, patio, driveway etc.
- Green power, green lighting.



SOLAR LAWN LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-SGL-B-001	ABS+Polysilicon	10hours	270x93x140MM
GY-SGL-B-002	ABS+Polysilicon	10hours	270x93x140MM
GY-SGL-B-003	Aluminum+Polysilicon	10hours	270x100x140MM

PRODUCT ADVANTAGES AND FEATURES

- Outdoor Led Solar Light has built-in LiFePo4 battery, 2000 times recycle.
- Solar powered light, easy for installation.
- Auto work design, one time set up, all done.
- Sensitive photocell sensor sense dan and night easily
- Great useful lighting for your garden, yard, aisle, porch, patio, driveway etc.
- Green power, green lighting.



RECHARGEABLE FAN



01 ROTATING WING LEAFS REGULATION: Rotating blades can adjust the speed of the fan and the angle of the fan.
02 LOW LIGHTING: Low light level and energy saving LED light source, 100%.
03 MULTIPLE CHARGING PORTS: With USB and Type C, the fan can be charged in two ways.

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-1001	ABS	8-10hours	200x50x315MM

PRODUCT ADVANTAGES AND FEATURES

- Portable and moveable
- New 3.7V Lithium-ion battery 300 to 500 recycle
- 0-100% speed selection.
- ABS material, anti-corrosion, substantial, durable, artistic, practical.
- Dimming night light design.
- DC and Type C input charge socket, 5V 1A USB output as a power bank.
- Remote control is available.



RECHARGEABLE FAN



01 Can be rotated up to 90 degrees
02 Handle on the back for easy handling
03 Anti-collision and fan, hidden safety, anti-fan

PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-RF-1	ABS	8-10hours	7 inches
GY-RF-Y	ABS	8-10hours	7 inches
GY-RF-USB	ABS	8-10hours	7 inches

PRODUCT ADVANTAGES AND FEATURES

- Turbocharged airflow
Large wind turbines agitate the surrounding air to circulate the airflow
- Five-leaf wing fan blade
Break through the traditional design, improve speed noise reduction
- Safety motor , smoother operation and quieter
The air duct curve conforms to aerodynamics, which is more conducive to air flow and reduces noise.
- Lithium iron phosphate battery, the discharge depth reaches 95%.
With high safety factor.
- High quality ABS material, anti-corrosion, substantial, durable, artistic, practical. High craft manifesting production value of famous brand.



SOLAR FAN



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-L16-2	ABS+Polysilicon	4-6hours	16 inches

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium-ion iron phosphate battery, the discharge depth reaches 95%. Under the discharge ratio of less than 0.5C, service life is up to 13 years, with high safety factor.
- Easy to assemble and clean
- Three wind speed level
- Five pcs wind Blade and give a strong wind
- Night light to give a illumination.
- USB output to give a E-device charge.



SOLAR FAN



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-P12-1	Aluminum+Polysilicom	8-10hours	12 inches

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium-ion iron phosphate battery, the discharge depth reaches 95%. Under the discharge ratio of less than 0.5C, service life is up to 13 years, with high safety factor.
- Battery remaining and wind speed digital LED display
- Three pcs aluminum wind Blade and give a strong wind
- USB output to give a E-device charge.



SOLAR FAN



PRODUCT TECHNICAL PARAMETERS

Model	Material	Working time	Size
GY-L12-1	ABS+Polysilicon	5-7hours	580x345MM

PRODUCT ADVANTAGES AND FEATURES

- Grade A+ solar cell, each cell has a complete IV curve. Conversion efficiency is more than 21.3%.
- Lithium-iron phosphate battery, the discharge depth reaches 95%. Under the discharge ratio of less than 0.5C, service life is up to 13 years, with high safety factor.
- Easy to assemble and clean design
- Three wind speed level
- Three pcs wind Blade and give a strong wind



SOLAR FAN



PRODUCT TECHNICAL PARAMETERS

Model	Material	Voltage	Size
GY-PGD-10W	Aluminum	110-240V	102x80x26MM
GY-PGD-20W	Aluminum	110-240V	120x95x28MM
GY-PGD-30W	Aluminum	110-240V	160x121x30MM
GY-PGD-50W	Aluminum	110-240V	202x156x30MM
GY-PGD-100W	Aluminum	110-240V	270x210x38MM
GY-PGD-150W	Aluminum	110-240V	322x231x38MM
GY-PGD-200W	Aluminum	110-240V	385x268x40MM
GY-PGD-300W	Aluminum	110-240V	421x307x45MM
GY-PGD-400W	Aluminum	110-240V	460x340x50MM

PRODUCT ADVANTAGES AND FEATURES

- Die-case aluminum body ensure good heatshink.
- High Lumen SMD, up to 120LM/W and long lifespan.
- Slim body design save packing volume.
- DOB PCB board, high cost performance.



STREET LIGHT



PRODUCT TECHNICAL PARAMETERS

Model	Material	Voltage	Size
GY-LD-50W	Aluminum	190-240V	362x145x63MM
GY-LD-100W	Aluminum	190-240V	486x165x63MM
GY-LD-150W	Aluminum	190-240V	545x206x72MM
GY-LD-200W	Aluminum	190-240V	623x235x72MM

PRODUCT ADVANTAGES AND FEATURES

- Die-cast aluminum body ensure good heatsink.
- High lumen SMD 3030 LED chip, up to 120LM/W and long lifespan.
- Slim body design save packing volume.
- High transmittance PC cover Lens.



TRIPOD STAND



PRODUCT TECHNICAL PARAMETERS

Model	Material	Size
GY-TPS-01	Iron	1.6M
GY-TPS-02	Iron	2M
GY-TPS-03	Iron	3M

PRODUCT ADVANTAGES AND FEATURES

- Durable heavy duty steel tripod body with a T bar which make it can hold 2 light;
- Triangle support, with anti-slip foot cover, the stand is super stable and ensures lighting safety.
- Can be adjustable to maximum height 1.6 meters ;
- Easy to install and collapses down great for storage or transport.

